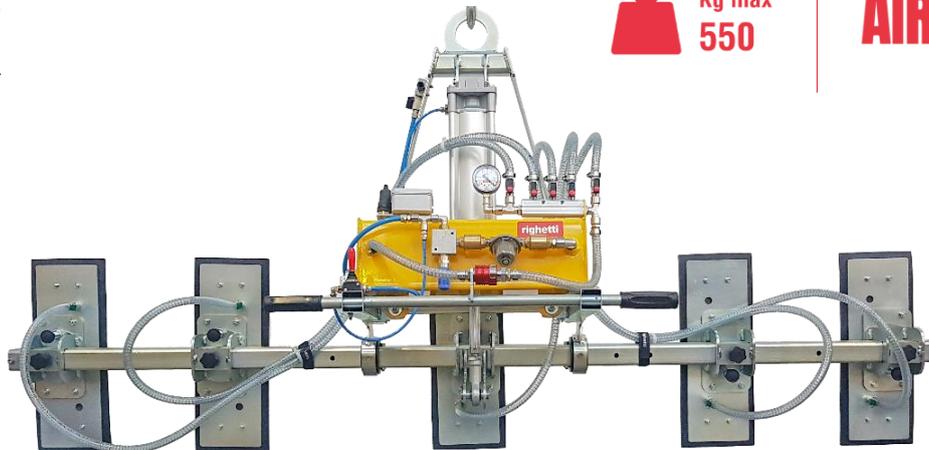


Series

P5A-K

Kitchen top vacuum lifter

 Kg max
550

AIR Power supply
Compressed Air


The P5A550K vacuum lifter is **specific for kitchen tops** and has a capacity of 550 kg. This lifter is powered by compressed air. The **pneumatic tilting system** allows an assisted movement of the load from vertical to horizontal and vice versa. Equipped with an on-off sliding valve against the involuntary release of the load. The vacuum gauge with coloured scale installed on the vacuum circuit allows constant control of the vacuum level reached in the circuit itself.

Equipped with an **audio-visual alarm** control unit that warns the operator of possible dangerous situations. Present a filtering system for dust and condensation. The vacuum tank accelerates the gripping and together with the non-return valve, ensures that the load is not immediately released if there is a sudden power failure.



Horizontal lifting

✓ 5 suction pads



Vertical lifting

✓ Max capacity 550 kg



Pneumatic tilt 0-90°

✓ Safety devices

CE


made in
ITALY

Technical specification

Application	Not porous stones
Lifting capacity	550 Kg
Suction pads	Nr. 5 rectangular suction pads mm 580x180 or 480x180
Load movement	0 – 90° powered tilt by pneumatic cylinder
Operating system	Compressed air
Vacuum system	Vacuum circuit, complete of vacuum reserve and non return valve
Control	Manual valve on the lifter's frame Release of the load by dual action security command
Standard features	Lifting beam L. 2200 mm On-off double sliding valve with safety Audible and visual low vacuum warning devices Vacuum gauge with colored scale, vacuum filter, non return valves
Optional	White gaskets Holder for hoist command Turnable pads 90°

Kitchen top vacuum lifter

Optional

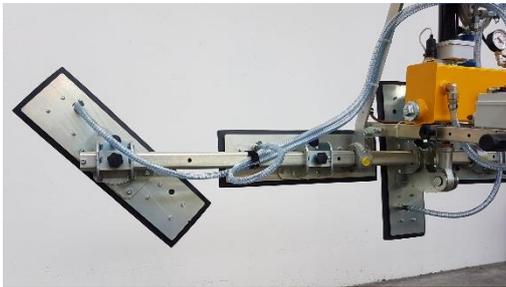


Support for quick rotation of the pads



White gaskets

Technical drawing

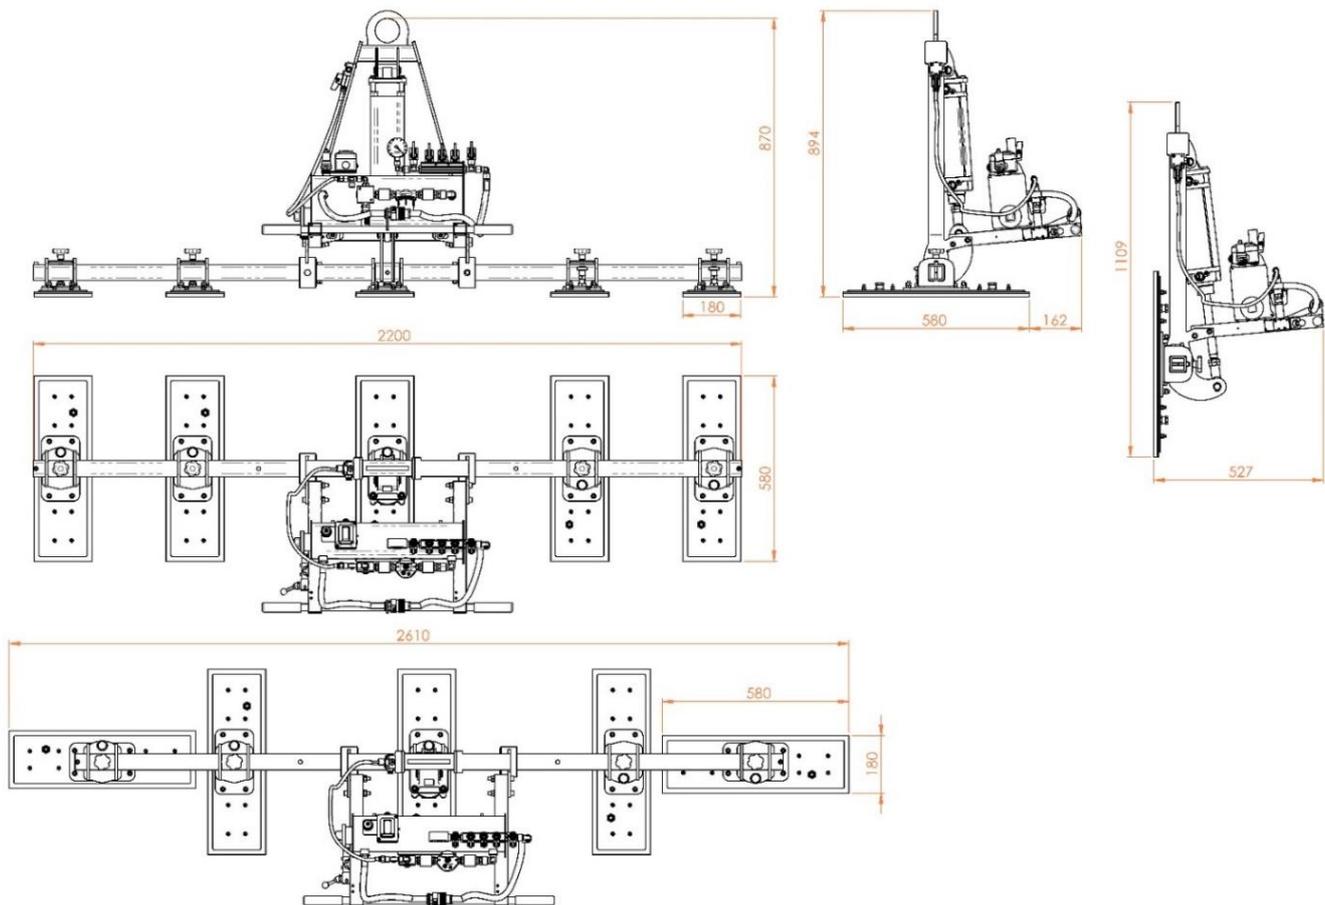

Series -P5A-K

 **Kg max 550**

Product code	Lifting capacity Kg	A (mm)	B (mm)	L	H
P5A450K	450	180	480	2200	870
P5A550K	550	180	580	2200	870